


## MX 7000®

Two Level, Versatile Design

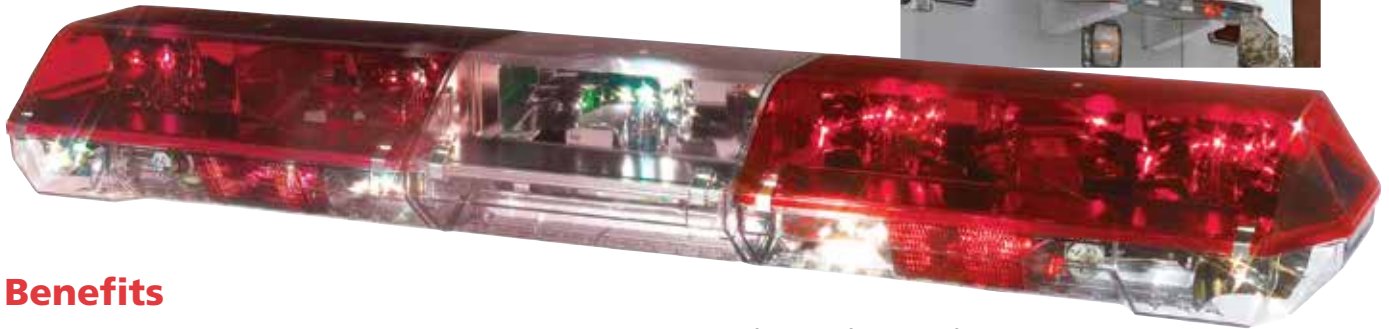

### Benefits

- Patented dual-deck design provides rotator power on the upper deck and flexibility for special function lights on the lower deck
- Sweeping intersection light for maximum safety in high-risk situations
- Easy maintenance with field replaceable strobe components

### Design Features

- LED, Strobe, Halogen or Combination Bars
- 50W Standard or Fast Rotators (Upper Level)
- 120° Sweeping Intersection Lights (Lower Level)
- Speaker Section Available in Some Lengths
- Easy to Install LIT3 Mounting Platform

### Options

- Build-Your-Own Base Models
- LED or Halogen ArrowStik®
- Lighted LIT3 Mounting Kit (LED and/or 55W Halogen)

### Specifications


- 18" (457 mm), 36" (914 mm), 47" (1194 mm), 52" (1321 mm), 58" (1473 mm), 69" (1753 mm), 80" (2032 mm) and 91" (2311 mm) Lengths
- 12"W x 5.75"H (305 x 146 mm)
- 12 Volt (24 Volt Option)
- Meets all applicable SAE, NFPA and California Title 13 specifications when properly configured.

### NFPA Configurations\*

718A1  
(Used in pairs for NFPA applications)




758A2




729NFPA1  
(Used in pairs for NFPA applications)




769NFPA1



758A1






769A1



\*80" and 91" Configurations also Available

### Chief & Officer 47" Configurations



UPPER DECK	MX 7000 LIGHTBAR KEY	LOWER DECK
50W STANDARD ROTATOR	DIAMOND MIRROR	LOWER DECK STROBE
50W FAST ROTATOR	HALF-DIAMOND MIRROR	CODE 3® OPTIX™ LED MODULE
LED X SINGLE MODULE	FLAT MIRROR	LED X SINGLE MODULE
LED X STACKED MODULES	V-MIRROR	LED X STACKED MODULES
STROBE MODULE (7")	CASCADE MIRROR	SWEEP LIGHTS
STROBE POWER SUPPLY	OSCILASER	INTERSECTION 120° SWEEP
	STOP/TURN/TAIL	50W STATIONARY HALOGEN
	SPEAKER COVER	28W STATIONARY
	50W UPPER STATIONARY	ALLEY LIGHT
		BUILT-IN ARROWSTIK
		D.O.T. LIGHTS
		BUILT-IN LED X ARROWSTIK
		BUILT-IN OPTIX ARROWSTIK

